

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 December 2006 (28.12.2006)

PCT

(10) International Publication Number  
**WO 2006/137170 A1**

(51) International Patent Classification:

B66F 9/22 (2006.01) F15B 21/08 (2006.01)  
F15B 11/04 (2006.01)

(21) International Application Number:

PCT/JP2005/012143

(22) International Filing Date: 24 June 2005 (24.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): KAYABA INDUSTRY CO., LTD. [JP/JP]; World Trade Center Bldg., 4-1, Hamamatsu-cho 2-chome, Minato-ku, Tokyo, 1056190 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): FUSHIMI, Kazunori [JP/JP]; c/o KAYABA INDUSTRY CO., LTD. World Trade Center Bldg., 4-1, Hamamatsu-cho 2-chome, Minato-ku, Tokyo, 1056190 (JP).

(74) Agent: GOTO, Masaki; Shoyu-Kaikan, 3-1, Kasumigasacki 3-chome, Chiyoda-ku, Tokyo 1000013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HYDRAULIC DRIVING DEVICE FOR OPERATING MACHINE

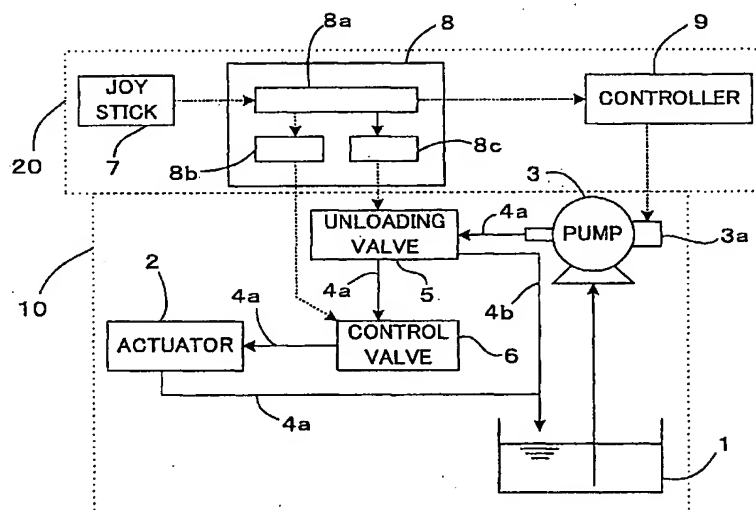

(57) Abstract: In a hydraulic driving device for an operating machine, when an output value of an operating device (7) is in a first predetermined range, a pump (3) is stopped and each of an open and closed valve (5) and a hydraulic control valve (6) is closed. When the output value goes beyond the first predetermined range, the pump is started and the open and closed valve is opened. When the output value goes beyond a second range greater than the first predetermined range, the hydraulic control valve is opened to supply a hydraulic fluid to an actuator (2).

WO 2006/137170 A1